

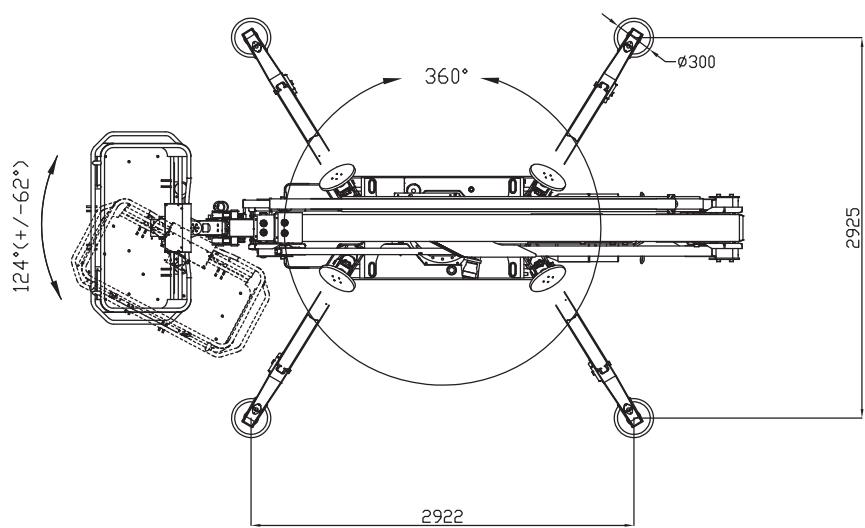
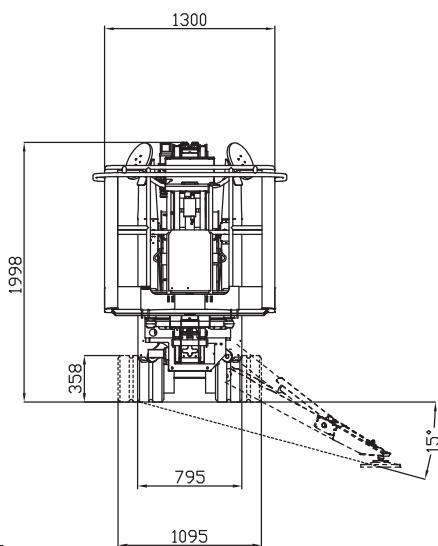


LIGHTLIFT 20.10 PERFORMANCE IIS MK2

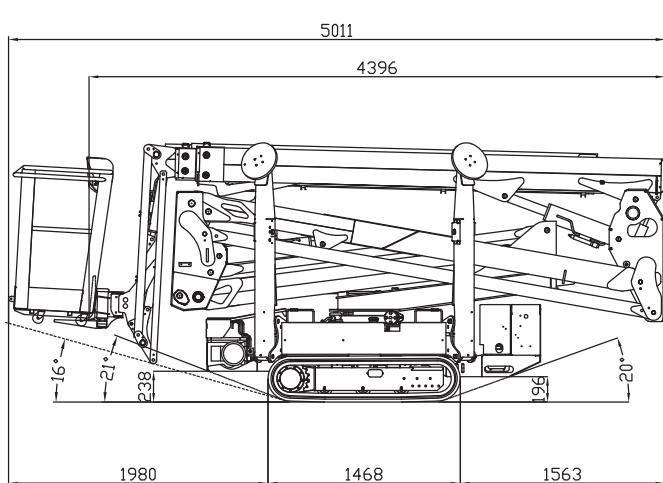

LIGHTLIFT 20.10 PERFORMANCE IS MK2

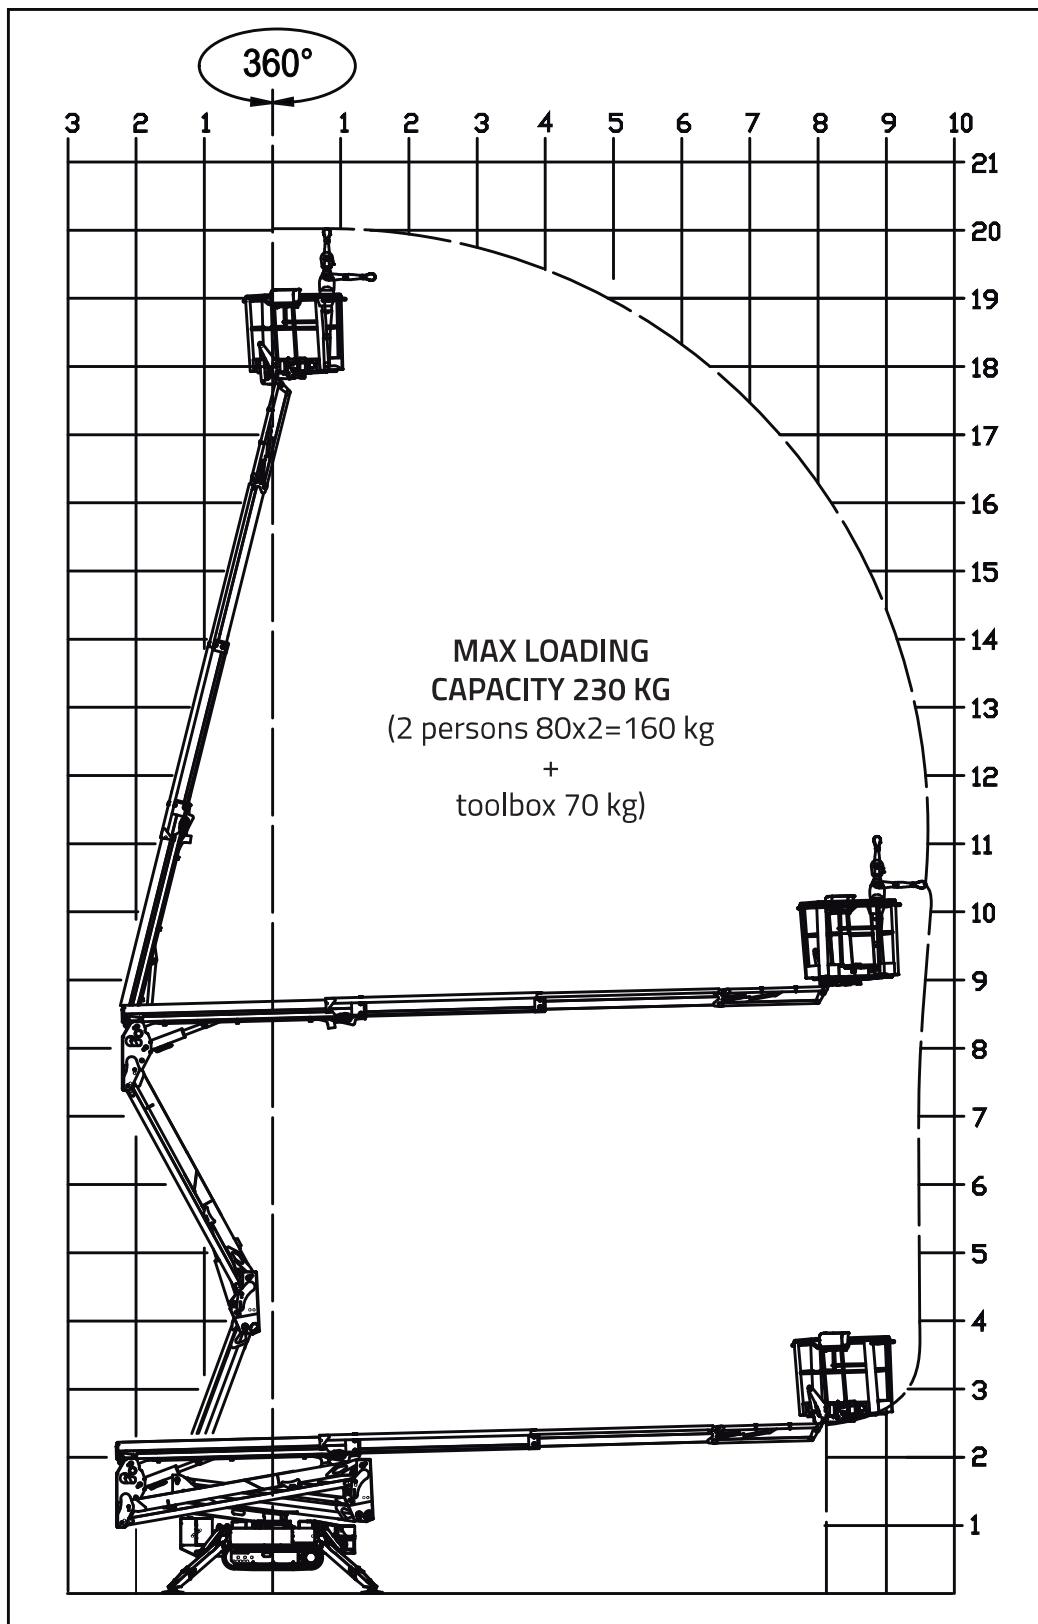

LIGHTLIFT 20.10 PERFORMANCE IS MK2

PETROL ENGINE

Brand	HONDA
Type	iGX390
Pistons no. and displacement	single-cylinder 389 cm ³
Max. gross power	11,7 HP - 8,7kW @ 3600 rpm
Electrical start	12 volt

DIESEL ENGINE

Brand.....	KUBOTA
Type	Z602
Pistons no. and displacement	single-cylinder 599 cm ³
Max. gross power	14,5 HP - 10,8kW @ 3200 rpm
Electrical start.....	12 volt

ELECTRIC MOTOR

Standard	230V / 50 Hz - 2,2 kW
Optional	110V / 50 Hz - 2,2 kW

HYDRAULIC PUMPS

Pump engine.....	no. 2 gear pumps
Pump electric motor.....	no. 2 gear pumps

TRACKED UNDERCARRIAGE

Track tensioner	grease-filled
Rollers no. per side	3 + slide
Widening system	795 / 1095 mm
Translation speed (petrol engine) with 2 nd auto2speed	0,4 - 1,0 - 1,95 km/h
Translation speed (diesel engine) with 2 nd auto2speed	0,5 - 1,3 - 2,5 km/h

WEIGHT MACHINE (petrol engine)	2840 kg
WEIGHT MACHINE (diesel engine)	2940 kg

FUEL TANK (petrol engine).....	5,3 litri
FUEL TANK (diesel engine).....	11 litri

MAX UPPER SLANT	16° / 28,7%
MAX WIND SPEED	12,5 m/s

LIGHTLIFT 20.10 PERFORMANCE IS MK2



ELECTRIC SYSTEM - LITHIUM ION

Electric system voltage	72V-12V
Lithium battery pack	7,2 KWh
Autonomy (continuous cycle)*	4-5 h
Onboard battery charger	220V 50Hz
Optional battery charger	110V 50Hz
Recharge time on flat batteries	4 h (indicative)
Recharge time to 80% on flat batteries.....	2 h (indicative)

HYDRAULIC PUMPS

Electric motor	no.2 gear pumps
----------------------	-----------------

TRACKED UNDERCARRIAGE

Track tensioner	grease-filled
Rollers no. per side	3 + slide
Widening system.....	795 / 1095 mm
Translation speed	0,83 - 1,6 km/h

WEIGHT MACHINE	2950 kg
MAX UPPER SLANT	16° / 28,7%
MAX WIND SPEED	12,5 m/s

* (Autonomy measured with Hinowa H2 operating cycle)